


Naaldtaatslager AZK8011511-IKO - AZK8011511-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldtaatslager/azk8011511-iko>

IKO
THRUST BEARINGS

Thrust Roller Bearings

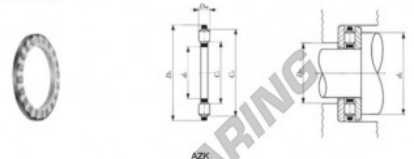

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
80	AZ 8011528	1 060	AZK 8011511	370	WS 80115	GS 80115		345

Boundary dimensions mm										Standard mounting dimensions mm	Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾	
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d _s Min.	D _s Max.	N	N	rpm
80	115	28	80.05	114.5	11	8.5	1	88	110	109	88	122 000	427 000	3 000

Notes: (1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060466099
Binnendiameter	80 mm
Binnendiameter	3.15" inch
Buitendiameter	115 mm
Buitendiameter	4.528" inch
Dikte	11 mm
Dikte	0.433" inch
Gewicht	370 g
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE