


Naaldtaatslager AZK14018012-IKO - AZK14018012-IKO

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldtaatslager/azk14018012-iko>

IKO
THRUST BEARINGS

Thrust Roller Bearings

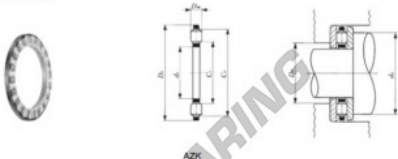

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
140	AZ 14018031	2 410	AZK 14018012	920	WS 140180	GS 140180		745

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d _s Min.	D _s Max.	N	N	rpm
140	180	31	140.1	179.5	12	9.5	1	150	174	173	150	184 000	798 000	1 900

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060466686
Binnendiameter	140 mm
Buitendiameter	180 mm
Dikte	12 mm
Gewicht	920 g
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE