

TAPR Stangkop

GIHN-K-12LO-DURBAL - GIHN-K-12LO-DURBAL


<https://www.123kogellager.be/kogellager-behuizing/stangkop/tapr/gihn-k-12lo-durbal>

GIHN-K-12LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

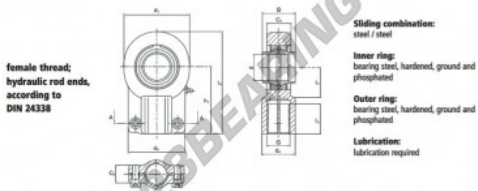

female thread;
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel

Inner ring:
bearing steel, hardened, ground and
phosphated

Outer ring:
bearing steel, hardened, ground and
phosphated

Lubrication:
lubrication required

order number	measurement [mm]			
right hand thread	d	d _h		
left hand thread	G	d _h		
GIHN-K 12 LO*	12 32	M 12 x 1,25 16,5 32 12 11 11		
type	measurement [mm]		load rating	weight
	l ₁ min	h ₁ l ₂ l ₃	C ₀ [N]	[kg]
GIHN-K / GIHN-KL 12 LO*	17	38 54,0 14	24,5	0,10

PRODUCTKENMERKEN

Merk	DURBAL
N° Ean13	3663952500027
Binnendiameter	12 mm
Buitendiameter	32 mm
Dikte	11 mm
Type	TAPR
Gewicht	100 g
Draad	Rechtse draad
Smering	met
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE