SI Stangkop
BRF20-00-502-DURBAL - BRF20-00-502-DURBAL

https://www.123kogellager.be/kogellager-behuizing/stangkop/si/brf20-00-502-durbal

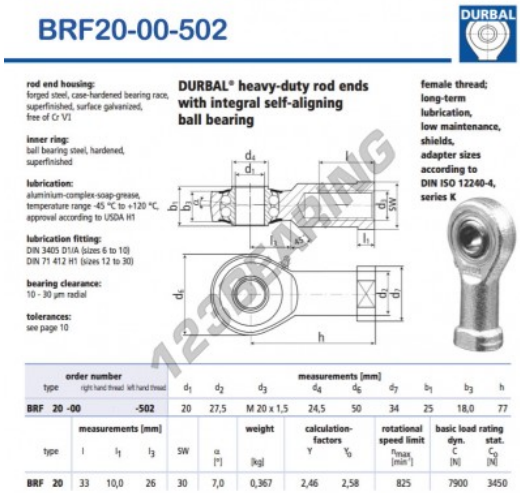

BRF20-00-502

DURBAL

rod end housing:
forged steel, case-hardened bearing race, superfinished, surface galvanized, free of Cr VI

inner ring:
ball bearing steel, hardened, superfinished

lubrication:
aluminium-complex-soap-grease, temperature range -45 °C to +120 °C, approval according to USDA H1

lubrication fitting:
DIN 3405 D1/A (sizes 6 to 10)
DIN 71 412 H1 (sizes 12 to 30)

bearing clearance:
10 - 30 µm radial

tolerances:
see page 10

DURBAL® heavy-duty rod ends with integral self-aligning ball bearing

female thread; long-term lubrication, low maintenance, shields, adapter sizes according to DIN ISO 12240-4, series K

order number type	right hand thread	left hand thread	measurements [mm] d_1	d_2	d_3	d_4	d_6	d_7	b_1	b_3	h
BRF 20 -00		-502	20	27,5	M 20 x 1,5	24,5	50	34	25	18,0	77

type	measurements [mm] l	l_1	l_3	SW	α [°]	weight [kg]	calculation-factors Y	Y_0	rotational speed limit n_{max} [min⁻¹]	basic load rating dyn. C [N]	stat. C_0 [N]
BRF 20	33	10,0	26	30	7,0	0,367	2,46	2,58	825	7900	3450

PRODUCTKENMERKEN

Merk	DURBAL
N° Ean13	3663952507286
Binnendiameter	20 mm
Buitendiameter	50 mm
Dikte	25 mm
Type	SI
Gewicht	367 g
Draad	Linkse draad
Smering	met
Verpakking	1

contact@123kogellager.be
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE