


Naaldhulslager BHKM1730JU-JTEKT - BHKM1730JU-JTEKT

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/bhkm1730ju-jtekt>

Drawn cup needle roller bearings 

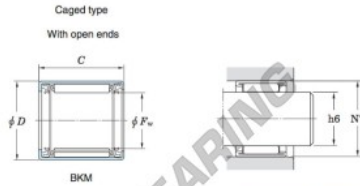

| Boundary dimensions (mm) | | | Basic load ratings (kN) | | Limiting speeds (min ⁻¹) | | Bearing No. ²⁾ | |
|--------------------------|-----|-----|-------------------------|-------|--------------------------------------|----------------------|---------------------------|-----------------|
| F_w | D | C | b min. | C_0 | C_{0e} | Oil lub. | Caged type | |
| | | | With open ends | | | | With open ends | With closed end |
| 17 | 24 | 30 | — | 20.1 | 31.3 | 11 000 ¹⁾ | BHKM1730JU | |

| Full complement type | | Recommended dimensions (mm) | | | | (Refer.) Mass (g) | |
|----------------------|-----------------|-----------------------------|--------|------------------------|--------|-------------------|-----------------|
| With open ends | With closed end | Shaft dia. (f6) | | Housing bore dia. (H7) | | With open ends | With closed end |
| | | min. | max. | min. | max. | | |
| — | — | 16.989 | 17.000 | 23.972 | 23.993 | 35 | — |

PRODUCTKENMERKEN

| | |
|----------------|----------------|
| Merk | JTEKT |
| N° Ean13 | 4549250328763 |
| Binnendiameter | 17 mm |
| Buitendiameter | 24 mm |
| Dikte | 30 mm |
| Gewicht | 35 g |
| Verpakking | 1 |
| Standaard | Geen standaard |

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE