


# Naaldhulslager 17BKM2517-JBUUH-JTEKT - 17BKM2517-JBUUH-JTEKT

<https://www.123kogellager.be/kogellager-behuizing/naaldlager/naaldhulslager/17bkm2517-jbuuh-jtekt>

Drawn cup needle roller bearings 

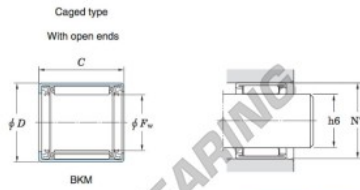

Boundary dimensions (mm)			Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )		Bearing No. <sup>2)</sup>	
$F_w$	$D$	$C$	$b$ min.	$C_r$	$C_{0r}$	Oil lub.	Caged type	
							With open ends	With closed end
17	25	16.70	—	7.30	7.90	11 000 <sup>1)</sup>	17BKM2517JBUUH	

Full complement type		Recommended dimensions (mm)				Refer. Mass (g)	
With open ends	With closed end	Shaft dia. ( $\phi 6$ )	Housing bore dia. ( $N7$ )		With open ends	With closed end	
		min.	max.	min.	max.		
—	—	16.989	17.000	24.972	24.993	20	—

## PRODUCTKENMERKEN

Merk	JTEKT
N° Ean13	3616060465306
Binnendiameter	17 mm
Buitendiameter	25 mm
Dikte	16.7 mm
Gewicht	20 g
Verpakking	1

[contact@123kogellager.be](mailto:contact@123kogellager.be)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE