


Rollager NNU4922K-JTEKT - NNU4922K-JTEKT

<https://www.123kogellager.be/kogellager-behuizing/rollager/roll/nnu4922k-jtekt>

Double-row cylindrical roller bearings Koyo

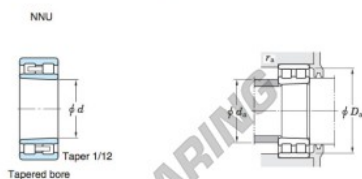

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min ⁻¹)		Bearing No.	
d	D	B	r _{min}	F _w	E _a	C ₁₀	C ₀₂	Grease lub.	Oil lub.	NN Cylindrical bore Tapered bore
110	150	40	1.1	123	—	163	326	3 700	4 500	

Mounting dimensions (mm)		Mounting dimensions (mm)				(Refer.) Mass (kg)			
NUU Cylindrical bore	NUU Tapered bore	d _a min.	d _a max.	D _a min.	D _a max.	r _s min.	r _s max.	Cylindrical bore	Tapered bore
		116.5	121	125	143.5	—	1	2.10	2.01

PRODUCTKENMERKEN

Merk	JTEKT
N° Ean13	3663952473918
Binnendiameter	110 mm
Buitendiameter	150 mm
Dikte	40 mm
Gewicht	2010 g
Verpakking	1

contact@123kogellager.be

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE