


## Kegellager

### JL44642A-JL44615-TIMKEN - JL44642A-JL44615-TIMKEN

<https://www.123kogellager.be/kogellager-behuizing/rollager/kegellager/jl44642a-jl44615-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

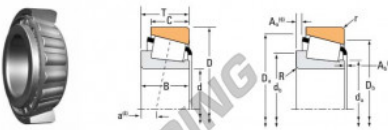

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width B	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynamic <sup>(1)</sup> C <sub>2</sub>	Factor <sup>(2)</sup> e <sub>2</sub>	Static C <sub>3</sub>	Inner	Outer	
mm	mm	mm	N		N	N	N			
25	52	14.22	22000	0.27	10200	9916	22000	JL44642A	JL44615	
0.0042	0.0042	0.0008	9500		2600	1208	7400			

Bearing Dimensions										Geometry Factors			Bearing Weights	
Width B	Width C	ER. Dr. α <sup>(1)</sup>	Max Shaft Fillet Radius R <sub>f1</sub>	Backing Shoulder Dia. d <sub>s</sub>	Max Housing Fillet Radius r <sub>1</sub>	Backing Shoulder Dia. D <sub>s</sub>	Cage A <sub>1</sub> <sup>(1)</sup>	A <sub>2</sub> <sup>(1)</sup>	A <sub>3</sub> <sup>(1)</sup>	G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>		
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm				kg	
14.22	16.668	-3.3	1.3	30.8	32.8	1.3	48.0	45.5	8.8	8.6	6.9	6.9	0.9526	6.94
0.0003	0.0003	-0.13	0.05	1.16	1.26	0.05	1.89	1.79	0.03	0.03			0.21	

## PRODUCTKENMERKEN

Merk	TIMKEN
N° Ean13	3663952309446
Binnendiameter	25 mm
Buitendiameter	52 mm
Dikte	14.22 mm
Verpakking	1

[contact@123kogellager.be](mailto:contact@123kogellager.be)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE